


High Power Solution for Multi-tube LCD Modules and Backlight Assemblies




- High Efficiency
- Low Power Loss
- Up to 14 CCF Tubes
- Up to 40 Watts of Output Power
- 85°C Maximum Operating Temperature
- Integrated Input and Output Connectors
- Stable Dimming to Low Brightness Levels
- Voltage Controlled or External PWM Dimming
- Fully Encapsulated Transformer for Increased Reliability
- Designed, Manufactured and Supported in the USA
- One Year Warranty

MC Platform

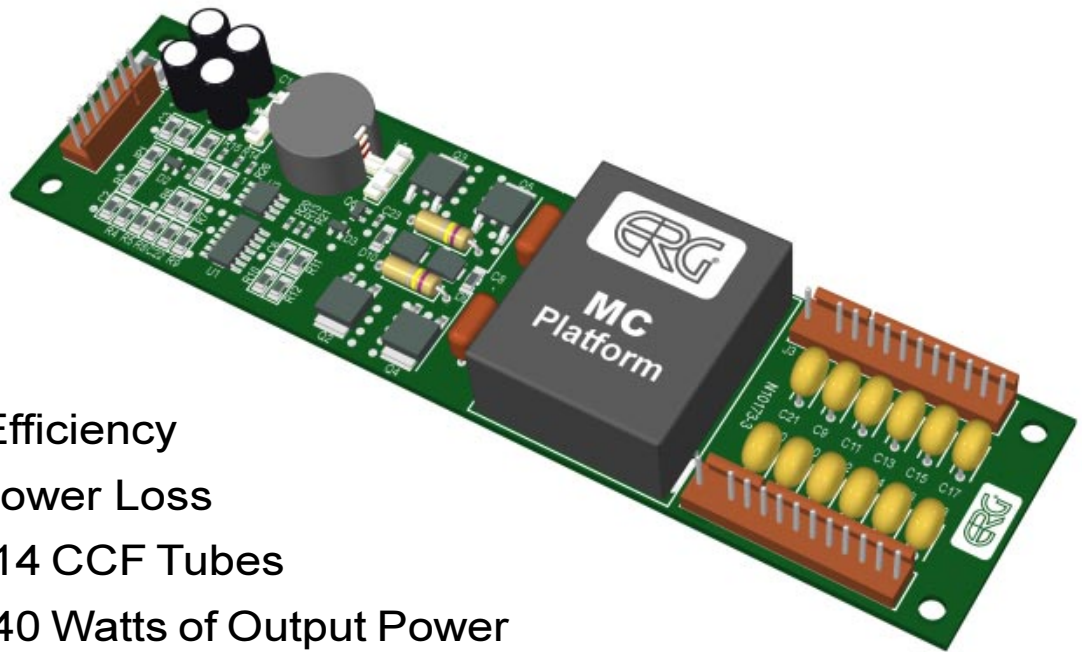

Product Configuration

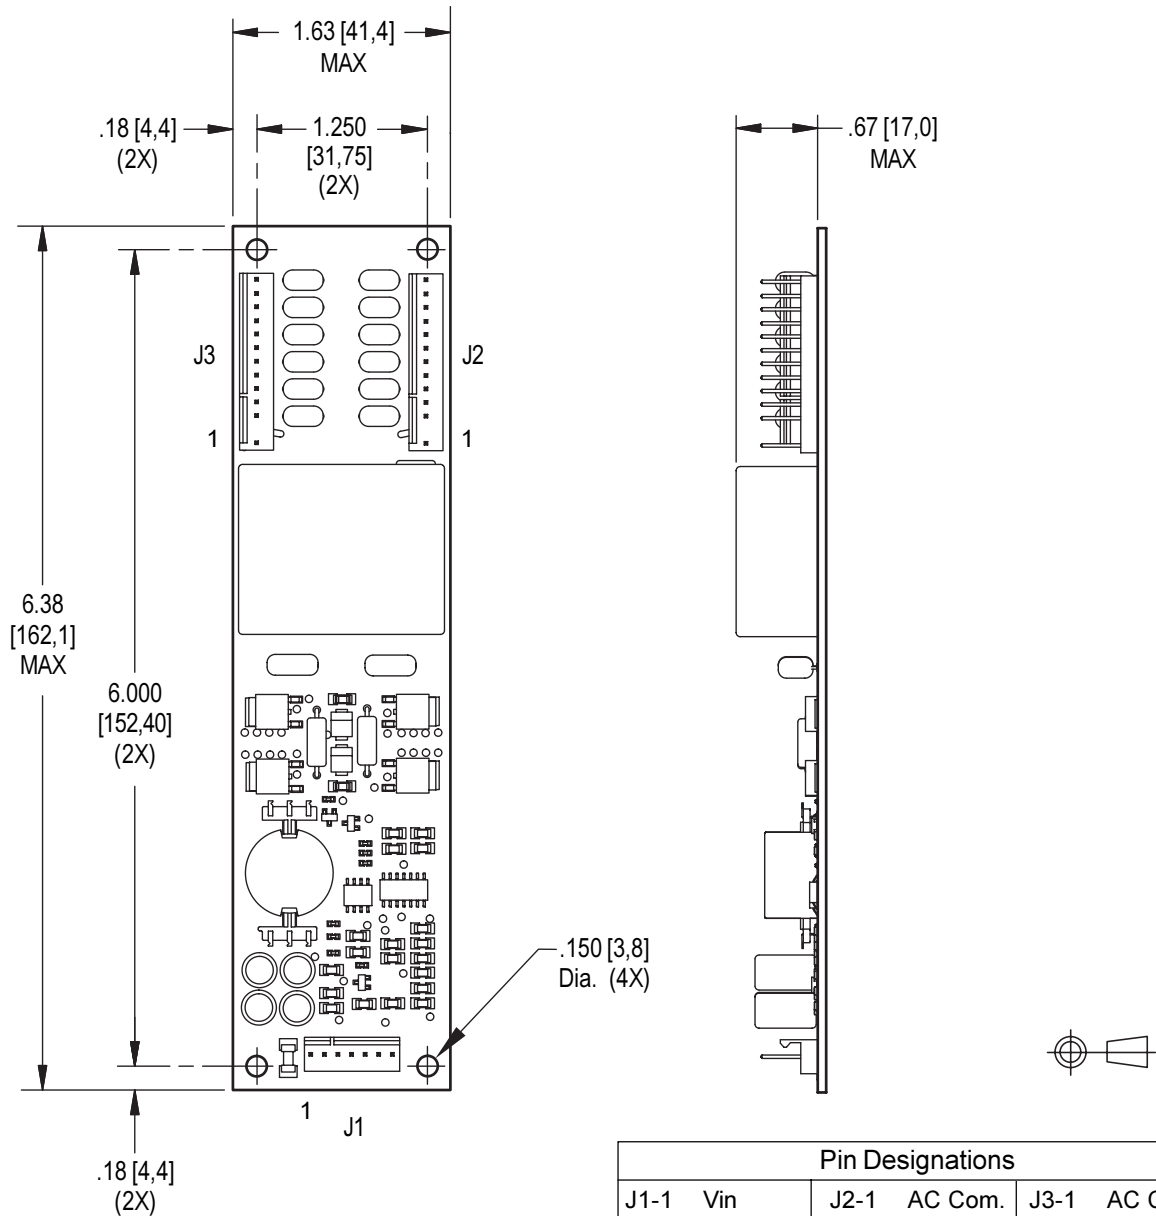

* This product assembly meets IPC-A-610 Class II Standards.

Mass: 80 grams

Pin Designations					
J1-1	Vin	J2-1	AC Com.	J3-1	AC Com.
J1-2	Vin	J2-2	NC	J3-2	NC
J1-3	GND	J2-3	Lamp	J3-3	Lamp
J1-4	GND	J2-4	NC	J3-4	NC
J1-5	Control	J2-5	Lamp	J3-5	Lamp
J1-6	Disable	J2-6	NC	J3-6	NC
J1-7	PWMOut	J2-7	Lamp	J3-7	Lamp
		J2-8	NC	J3-8	NC
		J2-9	Lamp	J3-9	Lamp
		J2-10	NC	J3-10	NC
		J2-11	Lamp	J3-11	Lamp
		J2-12	NC	J3-12	NC
		J2-13	Lamp	J3-13	Lamp

Specifications Subject to Change Without Notice



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760

607-754-9187 Fax 607-754-9255

<http://www.ergpower.com>

MC2 - 5/02