



Smart Force[™] SFDQ LED Driver

Driver for LED Backlights



- High Efficiency
- Less Than 14mm in Height
- Wide Input Voltage Design (10-20V)
- Maximum String Current of 560mA
- Maximum String Voltage of 70V
- Maximum Power of 30 Watts
- Powers up to 4 LED Strings
- External PWM dimming to 500:1; Onboard PWM 255:1
- OEM LED Panel Compatible
- Designed, Manufactured and Supported in the USA
- One Year Warranty






Endicott Research Group, Inc. 2601 Wayne Street • Endicott, NY 13760 607-754-9187 Fax 607-754-9255 www.ergpower.com





Smart Force™ SFDQ LED Driver

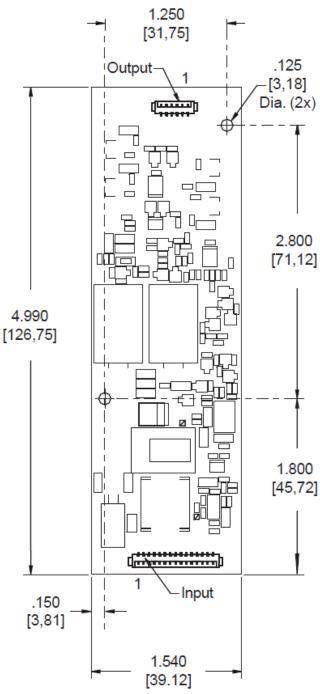

Specifications Subject to Change Without Notice 6/2012

Power solutions for LCD backlights





Endicott Research Group, Inc. 2601 Wayne Street • Endicott, NY 13760 607-754-9187 Fax 607-754-9255 www.ergpower.com

Smart Force™ Intelligent solutions for display backlighting

